


**System should be installed on solid concrete floor or VCT covered concrete floor.
Any existing carpet must be removed prior to installation at the rail locations.**

Floor levelness should meet standard General Contractor code of 1/8" over 10'.

Elevation
77 3/4" uprights
7 openings
6 @ 9 3/4" clear
1 @ 11 1/4" clear

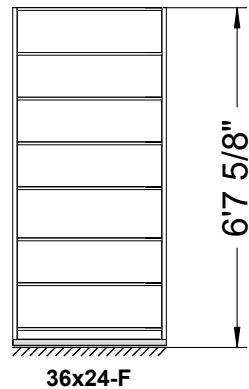

SOUTHWEST**SOLUTIONS**GROUP

business efficiency systems

www.southwestsolutions.com

1-800-803-1083