

SECURITY ROLLING SHUTTERS



Flem

ULTIMATE PROTECTION

PROTECTION YOU NEED

$$\begin{split} & = \sum_{k=1}^{n} - \frac{1}{2} e^{(k-1)k_k} \\ & = \sum_{k=1}^{n} - \frac{1}{2} e^{(k-1)k_k} \end{split}$$

PROTECT classrooms and furniture from extreme weather
SHIELD your students and staff from harmful threats
SECURE, 24 hour daily, weekend, and extended holiday protection


SECURITY ROLLING SHUTTERS

OPERATION

- Spring assist manual or powered operation options available
- Control effortlessly by switch, remote, WI-FI or app
- Smooth operation with low maintenance design
- Curtain rolls into a compact coil allowing a minimal sized and sleek box design
- Multiple features ensure secure protection from vandalism and force

MATERIALS


- Minimal size, high-tech roll formed aluminum housing
- Durable frame resists forced entry and daily wear
- Commercial grade aluminum Environmentally friendly materials
- Multiple curtain strengths, designs, and colors available to exceed the requirements of any application
- High security that will enhance the aesthetics and function of schools and educational facilities
- Shutters provide additional energy savings during the winter and summer

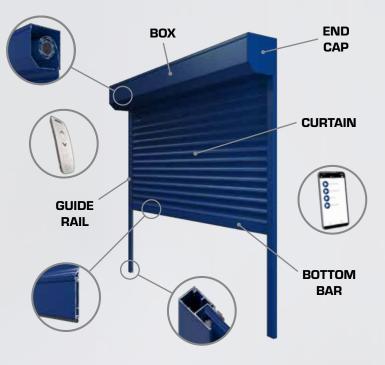

FRAME & CURTAIN COLOR OPTIONS

- · Not all series are available in all colors, contact your dealer for options
- Additional charge for dark bronze, black, and custom colors





BOTTOM BAR OPTIONS 57 mm (2.25 in) or 60 mm (2.36 in) Standard Bottom Bars

75 mm (3 in) Heavy Duty Bottom Bar

 Eliminating glass breakage, reducing on going maintenance costs

SECURE

- Deters intruders, giving you absolute peace of mind after school hours
- Creates a fully secure and protected school at the press of a button





- Effortlessly creates a secure barrier protecting staff and students
- Provides a durable shield from extreme weather conditions
- Blocks damaging sunlight from fading carpet and school furniture



- Protects your school premises from active shooters and stop intruders
- Enjoy peace of mind by being able to 'lockdown' immediately
- Protects school from crimes of opportunity with visible security



SHUTTER CURTAIN STYLES AND SIZING

Pentagon DefendaGuard curtain styles are finished in industry leading coatings, and provide options for visibility. Our engineered slats provide enhanced security as well as adding to the visual appeal of your facility.

400 Series	440 Series	450 Series	500 Series	530 Series	540 Series	560 Series	561 Series	562 Series
SOLID CURT	AIN							
	Description		400*	440*	450	500	540	560
	The solid curtain is available in the 40 440*, 450, 500, and 560 series. The series provide a highly secure barrier. *Available with light slots				Double wall extruded aluminum	Roll formed aluminum with regular density foam filling	Roll formed aluminum with ultra hard resi core	
PERFORATE	d curtain							
		Description					561	562
		transfer through t designed to provid	he shutter curtain a le an unobstructed v	able in both the 561 and 562 series. This curtain allows light urtain as well as optimal air flow. The small perforations options is ucted view through the the shutter. The large perforations option rod' grille door, with the advantage of having minimal moving parts			Single wall extruded aluminum with small perforations	Single wall extruded aluminum with large perforations
PATTERNED	CURTAIN			Description				530
	8			Clear anodized cor valuable strength	urtain is available using the 530 series in DefendaGuard. connector rods are used in between each slat, adding th and visual appeal to the curtain. The curtain patterns we ar, brick, straight, and window.			
BOTTOM BA	R SIZING							
Description The DefendaGuard s	system is compatibl			es) and the Heavy Du is extremely strong a		e size). 2.25 in		HD Bottom Bar 3 in (75 mm)
Description The DefendaGuard s The Standard Botto	system is compatibl m Bar is low profile					e size). 2.25 in	(57 mm) 3	
Description The DefendaGuard s The Standard Botto GUIDE RAIL	system is compatibl m Bar is low profile					e size). 2.25 in	(57 mm) (60 mm) (57 mm)	
Description The DefendaGuard s	system is compatibl m Bar is low profile SIZING s available in Defend	and secure. The Here	avy Duty Bottom Bar	r is extremely strong a	and durable.	e size). 2.25 in 2.36 in 83 mm	(57 mm) (60 mm) (57 mm	3 in (75 mm)
Description The DefendaGuard e The Standard Botto GUIDE RAIL Description 5 sizes of guide rails	system is compatibl m Bar is low profile SIZING s available in Defend the curtain to each	and secure. The Her laGuard. guide rail.	avy Duty Bottom Bar 53 mm	r is extremely strong a	66 mm	e size). 2.25 in 2.36 in 83 mm	(57 mm) (60 mm) (57 mm	3 in (75 mm) 33 mm - AnchorLoc
Description The DefendaGuard e The Standard Botto GUIDE RAIL Description 5 sizes of guide rails AnchorLoc secures SHUTTER AN	system is compatibl m Bar is low profile SIZING s available in Defend the curtain to each	and secure. The Her laGuard. guide rail.	avy Duty Bottom Bar 53 mm	64 mm 2.5 in (64 mm)	66 mm	e size). 2.25 in 2.36 in 83 mm mm) 3.25 in	(57 mm) (60 mm) (57 mm	3 in (75 mm) 33 mm - AnchorLoc 3.25 in (83 mm)
Description The DefendaGuard d The Standard Botto GUIDE RAIL Description 5 sizes of guide rails AnchorLoc secures SHUTTER AI Slat Profiles	system is compatible m Bar is low profile SIZING s available in Defend the curtain to each	and secure. The Hei laGuard. guide rail. I SIZING s	53 mm 2 in (53 mm)	64 mm 2.5 in (64 mm)	66 mm 2.6 in (66 i	e size). 2.25 in 2.36 in 83 mm mm) 3.25 in in Size	(57 mm) (60 mm) (60 mm) (63 mm) (7 10 mm) (7 1	3 in (75 mm) 33 mm - AnchorLoc 3.25 in (83 mm) ain Area
Description The DefendaGuard e The Standard Botto GUIDE RAIL Description 5 sizes of guide rails AnchorLoc secures	system is compatible m Bar is low profile SIZING sevailable in Defend the curtain to each ND CURTAIN Guide Rail Size 2 in (53 mm), 2	and secure. The Hei laGuard. guide rail. I SIZING s	53 mm 2 in (53 mm) Bottom Bar Size STD 2.25 in (57	64 mm 2.5 in (64 mm) 85 mm), HD 3 in	And durable. 66 mm 2.6 in (66 i Maximum Curta Width: Up to 300	e size). 2.25 in 2.36 in 83 mm mm) 3.25 in in Size D in (7620 mm) B in (5791 mm) D in (7620 mm)	(57 mm) (60 mm) 5 (83 mm) 5 Maximum Curt	3 in (75 mm) 33 mm - AnchorLoc 3.25 in (83 mm) ain Area sqr. m)

