

StoreMoreStore Bike Rack Assembly Instructions

Note: Shelf supports are tapped into place best using a hard rubber mallet. Self-tapping screws and anchors are not provided.

Step 1: Stand the vertical uprights up with the keyhole slots, as shown in figure 1.

Step 2: Place several shelf supports into the vertical uprights in various places to temporarily allow the unit to free stand. Gently tap down (these supports will be relocated later).

Step 3: Place a heavy-duty shelf support with the end flanges pointing up into the shelving upright slots at the desired height of the top of the bike hook (figure 1). Tap down in place.

Step 4: Leaving two open holes showing on the upright, place another heavy-duty support with end flanges pointing down into the holes of the upright (figure 1). Tap down in place.

Step 5: Place two light-duty shelf supports with the end flanges pointed down, one into the front and one into the back of the top holes of the uprights (these will support the top shelf). Tap down in place.

Step 6: Set either one or two of the "U-shaped" shelf reinforcements on the supports (these are used to reinforce the center area of the top shelf).

Step 7: Place the top shelf onto the supports.

Step 8: (For 88" high units with two shelves only) Locate where you want your intermediate shelf and install two of the lighter-duty supports into the front and back on the uprights (in the same way as step 5. Tap down in place.

Step 9: Set either one or two of the "U-shaped" shelf reinforcements on the supports (these are used to reinforce the center area of the intermediate shelf).

Step 10: Place the intermediate shelf onto the supports.

Step 11: Place two heavy-duty supports so that the lower tire will rest against them (it doesn't matter which way the end flanges point). Tap down into place.

Step 12: Using 1-1/4" self-tapping screws (not included), attach the bike hanger to the supports (where desired) using the top and bottom holes of the hanger bracket (figure2).

Step 13: Place two light-duty shelf supports with the end flanges pointed up, one into the front and one into the back of the bottom holes of the uprights (tap down into place and anchor to the floor if desired).


Step 14: Hang your bikes.



Figure 1



Figure 2

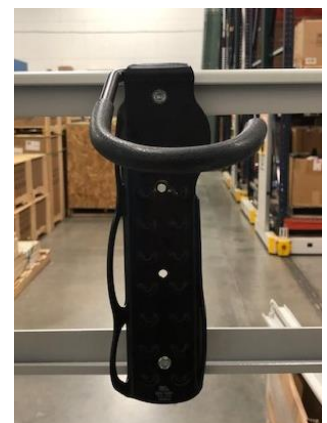

For Additional Reference